


## Datasheet:

Becom\_1HU\_PP RAL7035\_

BNCf\_BNCf 50\_12\_4GHz\_HS

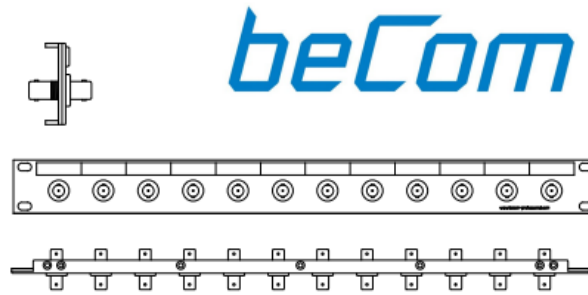

## Description:

The 12-port BNC-female to BNC-female patch panel offers several advantages over conventional patch panels. The sockets are mounted in specially machined mounting holes, which, together with the counter nut, provide protection against twisting of the socket when cables are connected. The easily replaceable labeling strip can be printed from a downloadable Excel file to ensure clear identification of the ports. An optional strain relief bracket is available, which can be mounted on the back of the patch panel and ensures that the cables are strain-relieved and can be bundled together.

---

## Technical Specifications:

- **Color:** RAL 7035 Light Grey
- **Dimensions:** 483 x 44 x 40 mm
- **Mounting:** 12x Huber + Suhner 34\_BNC-50-0-1/133
- **Weight:** 423g
- **Material:**
  - **Internal Contact:** Copper/Beryllium Alloy
  - **External Contact:** Brass

---

## Electrical Specifications:

- **Impedance:** 50  $\Omega$
- **Maximum Frequency (Interface F max):** 4 GHz
- **Return Loss:**  $\geq 34$  dB
- **VSWR (Voltage Standing Wave Ratio):** DC to 4 GHz  $\leq 1.08$