


Datasheet:
Becom_1HU_PP
RAL7035_Nf_Nf
50_20_11GHz_HS

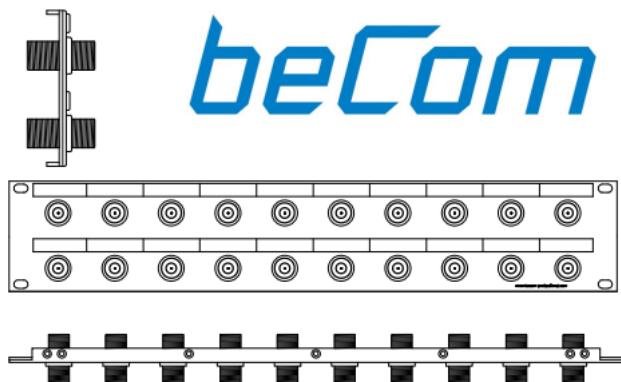

Description:

The 20-port patch panel with N-female to N-female connectors offers several advantages over conventional patch panels. The sockets are mounted in a specially milled mounting hole, which, together with the locknut, ensures protection against twisting of the socket when cables are connected. The easily replaceable labeling strip can be printed using a downloadable Excel file to ensure clear identification of the sockets. An optional strain relief bar, which is mounted at the rear of the patch panel, is available to ensure that the cables are strain-relieved and can be neatly bundled.

Technical Data:

Color: RAL 7035 Light Grey

Dimensions: 483 x 88 x 40 mm

Equipped with: 20 pcs. Huber Suhner 34_N-50-0-7

Weight: 1320g

Material:

- Inner contact: Copper/Beryllium alloy
- Outer contact: Brass

Electrical Data:

Impedance: 50 Ω

Interface Frequency Max: 11 GHz

VSWR:

- DC to 3 GHz: ≥ 24.9 dB
- 3 to 11 GHz: ≥ 14.7 dB