


Data Sheet:

Becom_1HU_PP

RAL7035_BNCf_BNCf

75_40_6GHz_DH

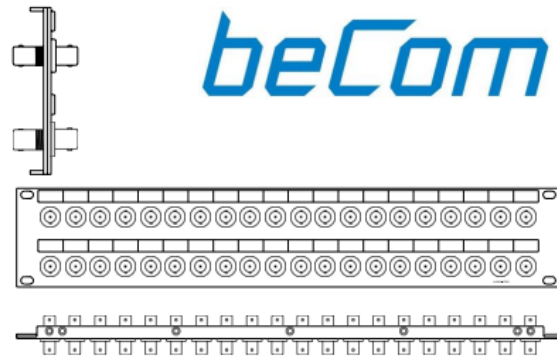

Description:

The 40-port BNC female-to-BNC female patch panel offers several advantages over conventional patch panels. The connectors are mounted in specially milled mounting holes, which, together with the locknut, ensure protection against twisting of the connector when the cables are connected. The easily replaceable labeling strip can be printed using a downloadable Excel file, ensuring clear identification of the connectors. An optional strain relief bar is available, which can be attached to the rear of the patch panel and ensures that the cables are strain-relieved and can be bundled neatly.

Technical Specifications:

- **Color:** RAL 7035 Light Grey
- **Dimensions:** 483 x 88 x 40 mm
- **Mounting:** 40 pcs Damar&Hagen BNC pro 1-8478-13100
- **Weight:** 760g
- **Material:**
 - **Internal Contact:** Copper/Beryllium Alloy
 - **External Contact:** Brass

Electrical Specifications:

- **Impedance:** 75 Ω
- **Maximum Frequency (Interface F max):** 6 GHz
- **Return Loss:** ≥ 32 dB
- **VSWR:** @3 GHz ≤ 1.05
@6 GHz ≤ 1.08