


DATASHEET

Becom_1HU_PP

RAL7035_BNCf_BNCf

75_16_3GHz_TE

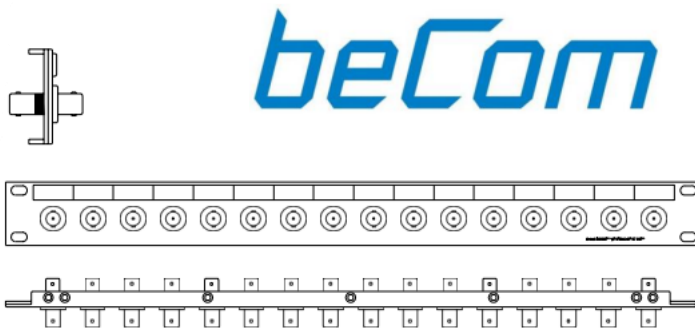

Description

The 16-port BNC female-to-BNC female patch panel offers several advantages over conventional patch panels. The jacks are mounted in a specially milled mounting hole, which, together with the locknut, provides protection against the jack twisting when connecting the cables. The easily replaceable labeling strip can be printed using a downloadable Excel file to ensure clear identification of the ports. An optional strain relief bar is available, which is mounted on the back of the patch panel and ensures that the cables are strain-relieved and can be bundled neatly.

Technical Data:

Color: RAL 7035 Light Grey

Dimensions: 483x44x23

Load: 16 x Telegärtner J01005A0007

Weight: 491g

Material: Inner Contact Copper/Beryllium Alloy

Outer Contact: Brass

Electrical Data:

Impedance: 75 Ω

Max Interface Frequency (F max): 3 GHz

Return Loss: ≥ 29 d