


# DATASHEET

Becom\_2HU\_PP

RAL7035\_BNCf\_BNCf

75\_40\_3GHz\_TE

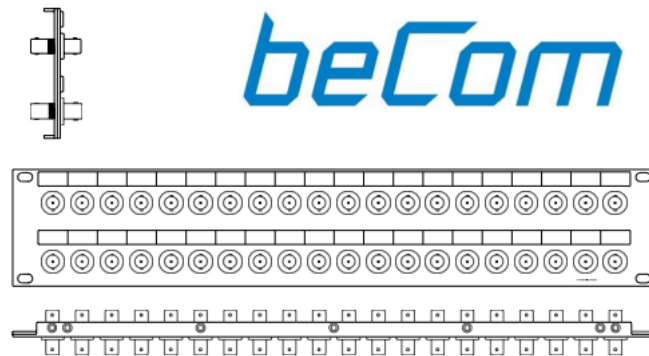

## Description

The 40-port BNC female-to-BNC female patch panel offers several advantages over conventional patch panels. The jacks are mounted in a specially milled mounting hole, which, together with the locknut, provides protection against the jack twisting when connecting the cables. The easily replaceable labeling strip can be printed using a downloadable Excel file to ensure clear identification of the ports. An optional strain relief bar is available, which is mounted on the back of the patch panel and ensures that the cables are strain-relieved and can be bundled neatly.

### Technical Data:

**Color:** RAL 7035 Light Grey

**Dimensions:** 483x88x23

**Load:** 40 x Telegärtner J01005A0007

**Weight:** 760g

**Material: Inner Contact** Copper/Beryllium Alloy

**Outer Contact:** Brass

### Electrical Data:

**Impedance:** 75  $\Omega$

**Max Interface Frequency (F max):** 3 GHz

**Return Loss:**  $\geq 29$  d