


Datasheet:

Becom_1HU_PP RAL7035_

BNCf_BNCf 50_8_4GHz_HS

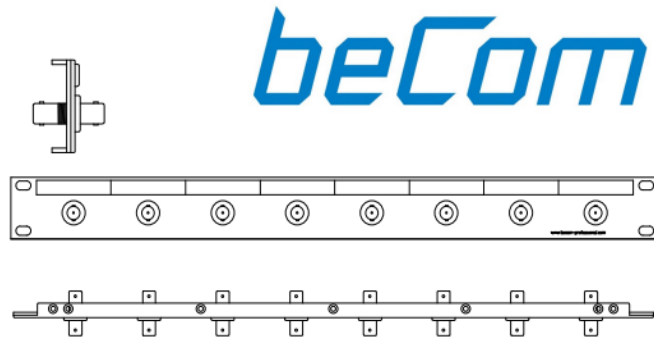

Description:

The 8-port BNC-female to BNC-female patch panel offers several advantages over conventional patch panels. The sockets are mounted in specially machined mounting holes, which, together with the counter nut, provide protection against twisting of the socket when cables are connected. The easily replaceable labeling strip can be printed from a downloadable Excel file to ensure clear identification of the ports. An optional strain relief bracket is available, which can be mounted on the back of the patch panel and ensures that the cables are strain-relieved and can be bundled together.

Technical Specifications:

- **Color:** RAL 7035 Light Grey
- **Dimensions:** 483 x 44 x 40 mm
- **Mounting:** 8 x Huber + Suhner 34_BNC-50-0-1/133
- **Weight:** 355g
- **Material:**
 - **Internal Contact:** Copper/Beryllium Alloy
 - **External Contact:** Brass

Electrical Specifications:

- **Impedance:** 50 Ω
- **Maximum Frequency (Interface F max):** 4 GHz
- **Return Loss:** ≥ 34 dB
- **VSWR (Voltage Standing Wave Ratio):** DC to 4 GHz ≤ 1.08