


Data Sheet:

Becom_1HU_PP

RAL7035_Nf_Nf

50_20_10GHz_TE

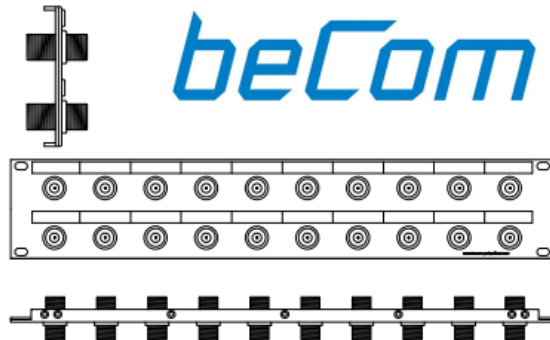

Description:

The 20-port patch panel N-female to N-female offers several advantages over conventional patch panels. The jacks are mounted in a specially milled mounting hole, which, together with the counter nut, ensures protection against the rotation of the jack when the cables are connected. The easily replaceable labeling strip can be printed using a downloadable Excel file to ensure the correct assignment of the jacks. An optional cable support bracket is available, which is mounted at the rear of the patch panel to ensure that the cables are strain-relieved and can be neatly bundled.

Technical Data:

Color: RAL 7035 Light Grey

Dimensions: 483x88x40

Configuration: 20 x Telegärtner J01024A0006

Weight: 1320g

Material:

Inner Contact: Copper/Beryllium alloy

Outer Contact: Brass

Electrical Data:

Impedance: 50 Ω

Max Interface Frequency (F max): 10 GHz

VSWR: 1.018 @ 1 GHz

VSWR: 1.094 @ 10 GHz